



[illegible]

Date 8/27/90 Label No. \_\_\_\_\_  
I hereby certify that, on the date indicated above I deposited this  
paper or fee with the U.S. Postal Service & that it was addressed  
for delivery to the Assistant Commissioner for Patents,  
Washington, DC 20231 by "Express Mail Post Office to  
Addressee" service.



Name (Print) D Beck Signature D Beck

PLEASE CHARGE ANY DEFICIENCY UP TO \$300.00 OR  
CREDIT ANY EXCESS IN THE FEES DUE WITH THIS  
DOCUMENT TO OUR DEPOSIT ACCOUNT NO. ~~04 0100~~

jc832 U.S. PTO  
09/605334  
  
06/27/00

805 Third Avenue  
New York, New York 10022  
212-527-7700

Docket No: **6727/0H560**

Box PATENT APPLICATION  
Assistant Commissioner for Patents  
Washington, DC 20231

Sir:

Enclosed please find an application for United States patent as identified below:

Inventor/s (name ALL inventors): Daniel GEIST, Orna GRUMBERG and Sagi KATZ

Title: IDENTIFICATION OF MISSING PROPERTIES IN MODEL CHECKING

including the items indicated:

1. Specification and 32 claims: 6 indep.; 26 dep.; 0 multiple dep.
2. ☐ Executed declaration and power of attorney  
☒ Unexecuted declaration and power of attorney
3. ☒ Formal drawings, 5 sheets (Figs. 1-5)  
☐ Informal drawings,    sheets (Figs. )
4. ☐ Assignment for recording to:

5. ☐ Verified Statement Claiming Small Entity Status
6. ☐ Check in amount of \$1,140.00, (\$1,140.00 filing; \$     recording)  
(See attached **Fee Computation Sheet**)
7. ☐ Preliminary Amendment.
8. ☐ Please amend the description by inserting the following paragraph after the line containing the title on page 1:  
"This patent application claims the priority of U.S. provisional patent application No. 60/, which is incorporated herein by reference."


Priority is claimed for this application, corresponding application/s having been filed as follows:

Country: ISRAEL  
Number: 132058  
Date: SEPTEMBER 23, 1999

The priority documents ☐ are enclosed  
☒ will follow.

Respectfully submitted,

Dated: June 27, 2000

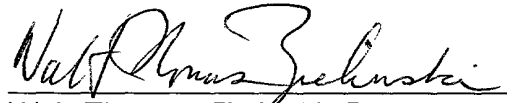  
Walt Thomas Zielinski, Esq.  
Reg. No. 18,902  
Attorney for Applicant(s)

DARBY & DARBY P.C.  
805 Third Avenue  
New York, New York 10022  
212-527-7700

PATENT FEE COMPUTATION SHEET

	No. of Claims Presented	Extra Claims Previously Paid For	Number of Extra Claims	Rate
Basic Fee . . . . .				\$690.00
Total Claims	32 - 20	- 0 = 0	12 x \$18.00	\$216.00
Independent Claims	6 - 3	- 0 = 0	3 x \$78.00	\$234.00
Multiple Dependent Claims		- if so, add	\$260.00	\$0.00
Surcharge for late submission of filing fee and/or declaration (\$130.00)				\$0.00
SUBTOTAL . . . . .				\$1,140.00
<input type="checkbox"/> Small Entity REDUCTION (Half of Subtotal) . . . . .				\$0.00
Fee for recordation of assignment (\$40.00) . . . . .				\$0.00
Charge for filing non-English language application (\$130.00) . . . . .				\$0.00
TOTAL . . . . .				\$1,140.00

IDENTIFICATION OF MISSING PROPERTIES IN MODEL CHECKING**FIELD OF THE INVENTION**

The present invention relates generally to design automation and verification, and specifically to hardware verification of integrated circuit design.

**BACKGROUND OF THE INVENTION**

Hardware verification is currently the bottleneck and the most expensive task in the design of a semiconductor integrated circuit. Model checking is a method of formal verification that is gaining in popularity for this purpose. The method is described generally by Clarke et al. in *Model Checking* (MIT Press, 1999), which is incorporated herein by reference.

To perform model checking of the design of a device, a verification engineer reads the definition and functional specifications of the device and then, based on this information, writes a set of properties  $\{\phi\}$  (also known as a specification) that the design is expected to fulfill. The properties are written in a suitable specification language for expressing temporal logic relationships between the inputs and outputs of the device. Such languages are commonly based on Computation Tree Logic (CTL). A hardware model  $M$  (also known as an implementation) of the design, which is typically written in a hardware description language, such as VHDL or Verilog, is then tested to ascertain that the model satisfies all of the properties in the set, i.e., that  $M \models \phi$ , under all possible input sequences. Such testing is a form of reachability analysis.

IS999-035

1

EXPRESS MAIL CERTIFICATE

6/27/00 628221122

I hereby certify that, on the date indicated above I deposited this paper or fee with the U.S. Postal Service & that it was addressed for delivery to the Commissioner of Patents & Trademarks, Washington D.C. 20231 by "Express Mail Post Office to Addressee" service.

Name (Print)

Signature

Model checking is preferably carried out automatically by a symbolic model checking program, such as SMV, as described, for example, by McMillan in *Symbolic Model Checking* (Kluwer Academic Publishers, 5 1993), which is incorporated herein by reference. A number of practical model checking tools are available, among them RuleBase, developed by IBM, which is described by Beer et al. in "RuleBase: an Industry-Oriented Formal Verification Tool," in *Proceedings of the Design* 10 *Automation Conference DAC'96* (Las Vegas, Nevada, 1996), which is incorporated herein by reference.

As hardware devices grow larger and more complex, the set of properties needed for model checking becomes unwieldy. The verification engineer has no systematic 15 way to be sure of whether the property set is complete, in the sense of covering all possible states and transitions that may occur in the model. If the property set is incomplete, a bug in the design may go undetected. The engineer may therefore continue to add more and more 20 properties indefinitely, never knowing whether the set is yet sufficient or not.

Coverage metrics have been applied in various fields of simulation-based verification in order to measure and improve the completeness with which a given simulation 25 tool represents the actual behavior of a target system. An application of such a metric to model checking is described by Hoskote et al. in "Coverage Estimation for Symbolic Model Checking," in *Proceedings of the Design Automation Conference DAC'99* (IEEE Computer Society 30 Press, 1999), which is incorporated herein by reference. The authors present a method for estimating whether a set of properties is sufficient to cover all possible states



**SUMMARY OF THE INVENTION**

It is an object of some aspects of the present invention to provide improved methods and systems for design verification.

5 It is a further object of some aspects of the present invention to provide improved methods and metrics for analyzing the coverage of a set of properties used in model checking, and in particular to provide methods for analyzing path coverage.

10 In preferred embodiments of the present invention, a specification, consisting of properties, is generated to verify a given implementation model of a target system, and a tableau is constructed corresponding to the properties. Such a tableau is defined as a finite state  
15 machine that satisfies all of the properties in the specification. The states and transitions of the tableau are compared to those of the model to ascertain that there is full correspondence between the possible states and transitions of the model and those of the tableau.  
20 To the extent that there are no substantive differences, it is concluded that the set of properties fully specifies the model.

In some preferred embodiments of the present invention, the tableau is compared to the model by  
25 inputting the tableau to a model checking program, such as SMV, along with the given model. If for every possible combination of inputs, the tableau gives exactly the same set of outputs as the model, then the specification of the properties is complete. On the  
30 other hand, if a difference occurs for some input, it means that the specified properties are insufficient and/or that there is an error in the model. The fact

that the outputs of the tableau exactly correspond to those of the model indicates that for every reachable state of the tableau, there is a corresponding state in the model, and for every possible transition in the tableau, there is a corresponding transition between the corresponding states in the model. It also means that there are no excess transitions or spurious initial conditions in the tableau that would allow transitions to be made among states in a way that would not be possible in the model.

The methods of the present invention thus inform the user when the specification of properties is complete or, alternatively, provide an indication as to where there may be flaws in the correspondence between the specification and the model. Such flaws typically point either to a state or transition in the tableau that is not implemented in the model, thus warning either that the specification does not adequately constrain the model, or that the model has failed to implement a meaningful state or transition of the target system. By comparison, the method of Hoskote et al. is limited to finding an estimation of state coverage, and not transitions or exact state coverage, and therefore cannot provide a conclusive indication that the set of properties is complete.

There is therefore provided, in accordance with a preferred embodiment of the present invention, a method for verification, including:

providing an implementation model, which defines model states of a target system and model transitions between the model states;



providing a specification of the target system, including properties that the system is expected to obey;

creating a tableau from the specification, the tableau defining tableau states with tableau transitions  
5 between the tableau states in accordance with the properties; and

comparing the tableau transitions to the model transitions to determine whether a discrepancy exists therebetween.

10 In a preferred embodiment, creating the tableau includes defining a finite state machine using a hardware description language, wherein the implementation model has model inputs and outputs, and wherein defining the finite state machine includes describing a virtual device  
15 having inputs and outputs corresponding to the model inputs and outputs of the implementation model. Preferably, comparing the transitions includes performing a reachability analysis using both the implementation model and the tableau while providing identical inputs to  
20 the inputs of both the implementation model and the tableau, and verifying that the outputs are always identical. Most preferably, performing the reachability analysis includes comparing the model and the tableau automatically using a model checker and providing  
25 evidence of a tableau transition that is not implemented in the model.

In another preferred embodiment, comparing the tableau transitions includes associating model transitions with corresponding tableau transitions,  
30 wherein associating the transitions includes defining a reachable simulation preorder relating the model and the tableau. Preferably, associating the transitions

includes finding a tableau transition that is not implemented in the model and, most preferably, deriving an indication, based on the unimplemented transition, that the specification is not complete with respect to the model. Alternatively or additionally, finding the tableau transition that is not implemented in the model includes deriving an indication, based on the unimplemented transition, that a transition of the target system is missing in the model.

Preferably, the method includes associating model states with corresponding tableau states. Further preferably, associating the model states with the corresponding tableau states includes finding a tableau state that is not implemented in the model and deriving an indication, based on the unimplemented state, that the specification is not complete with respect to the model. Alternatively or additionally, finding the tableau state that is not implemented in the model includes deriving an indication, based on the unimplemented state, that a state of the target system is missing in the model. Further alternatively or additionally, associating the model states with the corresponding tableau states includes finding multiple model states corresponding to a single tableau state.

Preferably, creating the tableau includes creating a reduced tableau from which one or more redundant states have been eliminated.

Further preferably, comparing the transitions includes verifying that the specification is a complete and correct description of the implementation model responsive to the comparison.

There is also provided, in accordance with a preferred embodiment of the present invention, a verification processor, which is configured to receive an implementation model, defining model states of a target system and model transitions between the model states, and to receive a specification of the target system, including properties that the system is expected to obey, and which is operative to create a tableau from the specification, the tableau defining tableau states with tableau transitions between the tableau states in accordance with the properties, and to compare the tableau transitions to the model transitions to determine whether a discrepancy exists therebetween. Preferably, the processor is operative to perform model checking of the implementation model.

There is further provided, in accordance with a preferred embodiment of the present invention, a computer software product for verification of a specification of a target system, which specification includes properties that the system is expected to obey, by comparison with an implementation model, which defines model states of the target system and model transitions between the model states, the product including a computer-readable medium having computer program instructions recorded therein, which instructions, when read by a computer, cause the computer to create a tableau from the specification, the tableau defining tableau states with tableau transitions between the tableau states in accordance with the properties, and to compare the tableau transitions to the model transitions to determine whether a discrepancy exists therebetween.

Preferably, the program instructions cause the computer to compare the tableau with the model by running a reachability analysis using both the implementation model and the tableau while providing identical inputs to the inputs of both the implementation model and the tableau, and verifying that the outputs are always identical. Most preferably, the reachability analysis is performed using an automatic model checker, and the instructions cause the computer to verify that the specification is a complete description of the implementation model.

There is additionally provided, in accordance with a preferred embodiment of the present invention, a method for verification, including:

providing an implementation model, which defines model states of a target system and model transitions between the model states;

providing a specification of the target system, including properties that the system is expected to obey;

creating a tableau from the specification, the tableau defining tableau states with tableau transitions between the tableau states in accordance with the properties; and

comparing the model and the tableau by inputting the model and the tableau to an automatic model checking program.

Preferably, comparing the model and the tableau includes providing evidence of a transition or state in the tableau that is not implemented in the model, most preferably in the form of a counter-example indicative of the unimplemented transition or state.

There is moreover provided, in accordance with a preferred embodiment of the present invention, model checking apparatus, which is configured to receive an implementation model, defining model states of a target system and model transitions between the model states, and to receive a specification of the target system, including properties that the system is expected to obey, and which is operative to create a tableau from the specification, the tableau defining tableau states with tableau transitions between the tableau states in accordance with the properties, and to compare the tableau to the model by inputting the model and the tableau to an automatic model checking program.

There is furthermore provided, in accordance with a preferred embodiment of the present invention, a computer software product for verification of a specification of a target system, which specification includes properties that the system is expected to obey, by comparison with an implementation model, which defines model states of the target system and model transitions between the model states, the product including a computer-readable medium having computer program instructions recorded therein, which instructions, when read by a computer, cause the computer to create a tableau from the specification, the tableau defining tableau states with tableau transitions between the tableau states in accordance with the properties, and to compare the tableau to the model by inputting the model and the tableau to an automatic model checking program.

The present invention will be more fully understood from the following detailed description of the preferred

embodiments thereof, taken together with the drawings in which:

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic pictorial illustration showing  
5 a system for model checking, in accordance with a preferred embodiment of the present invention;

Fig. 2 is a block diagram that schematically  
illustrates an implementation model used in model  
checking and a corresponding tableau of properties, in  
10 accordance with a preferred embodiment of the present invention;

Fig. 3 is a state diagram that schematically  
illustrates a finite state machine corresponding to the  
tableau of Fig. 2, in accordance with a preferred  
15 embodiment of the present invention;

Fig. 4 is a flow chart that schematically  
illustrates a method for verifying a set of properties  
generated for the purpose of model checking, in  
accordance with a preferred embodiment of the present  
20 invention; and

Fig. 5 is a flow chart that schematically  
illustrates another method for verifying a set of  
properties generated for the purpose of model checking,  
in accordance with a preferred embodiment of the present  
25 invention.

**DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS**

Fig. 1 is a schematic pictorial illustration of a system 20 for model checking, in accordance with a preferred embodiment of the present invention. System 20 typically comprises a verification processor 22, typically a general-purpose computer workstation running suitable model checking software, such as the above-mentioned IBM RuleBase, under the control of a verification engineer 24. The system receives a hardware implementation model 26 of a target system or device 30 in development. Engineer 24 prepares a specification of properties 28, for use in model checking of model 26. The completeness and correctness of the specification are verified by system 20 using methods described in detail hereinbelow.

Reference is now made to Fig. 2, which is a block diagram representing a model of a target hardware device 40, in this case a simple two-port synchronous arbiter, used hereinbelow to exemplify a method for verifying property set 28, in accordance with a preferred embodiment of the present invention. Device 40 has two request inputs 42, labeled REQ0 and REQ1, and two acknowledge outputs 44, ACK0 and ACK1. The assertion of ACKi is a response to the assertion of REQi. Initially, both outputs of the arbiter are inactive. At any time, at most one acknowledge output may be active. The arbiter grants one of the active requests in the next cycle, and uses a round robin algorithm in case both request inputs are active. In the case of simultaneous assertion (i.e. both requests are asserted and were not asserted in the previous cycle), REQ0 has priority in the first simultaneous assertion occurrence. In any

subsequent occurrence of simultaneous assertion the priority rotates with respect to the previous occurrence.

An implementation of device 40 in the SMV language is presented below in Table I:

5

TABLE I

```

1) var
2)   req0; req1; ack0; ack1; robin : boolean;
3) assign
4)   init(ack0) := 0;
10 5)   init(ack1) := 0;
6)   init(robin):=0;
7) next(ack0)   := case
8)   !req0           : 0;      - No request results no
                                ack
15 9)   !req1           : 1;      - A single request
10)  !ack0&!ack1      : !robin; - Simultaneous requests
                                assertions
11)  1                 : !ack0; - Both requesting, toggle
                                ack
20 12) esac;
13) next(ack1) := case
14)  !req1           : 0;      - No request results no
                                ack
15)  !req0           : 1;      - A single request
25 16)  !ack0&!ack1    : robin; - Simultaneous assertion
17)  1                 : !ack1; - Both requesting, toggle
                                ack
18) esac;
19) next(robin) :=if req0&req1&!ack0&!ack1 then !robin
30 20)                else robin endif; - Two
                                simultaneous request

```



## assertions

From the functional specification of arbiter 40 given above, the following temporal formulas are derived that describe the properties of the device:

1. The initial state is  $\neg \text{ack0} \wedge \neg \text{ack1}$ .
2. At all times, mutual exclusion holds, i.e.,  $\neg \text{ack0} \vee \neg \text{ack1}$  (property  $\phi 1$ ).
3. At all times one of the following properties should hold:
  - a) No requests followed by no acknowledge (property  $\phi 2$ ).
  - b) A single request (when the other request is not active) is served in the following cycle (properties  $\phi 3$  and  $\phi 4$ ).
  - c) A request active while the alternate channel is being served will be served in the following cycle (properties  $\phi 5$  and  $\phi 6$ ).
  - d) When a cycle with no active request is followed by a cycle with two active requests, the result will be as follows -
    - The first such occurrence will result in acknowledgment to channel 0 ( $\phi 0$ ).
    - Each subsequent occurrence will result in acknowledgment of the channel that was not acknowledged in the previous occurrence ( $\phi 7$  and  $\phi 8$ ).

The behavior of the arbiter under these conditions (no active request followed by two active requests)

is governed by the non-observable variable "robin," as defined in Table I.

The above formulas correspond to the properties  $\phi_0$ ,  $\phi_1$ , ...,  $\phi_8$  listed symbolically below in Table II, which are a complete specification of arbiter 40 written in the form of a safety formula  $\psi$  in Universal Computation Tree Logic (known as ACTL). ACTL is a branching-time temporal logic. It is described in detail by Grumberg et al. in "Model Checking and Modular Verification," in *ACM Transactions on Programming Languages and Systems* **16**(3) (1994), pp. 843-871, which is incorporated herein by reference. As the variable "robin" is not observable, it does not appear explicitly in the properties in Table II.

TABLE II

15	$\psi = \neg \text{ack0} \wedge \neg \text{ack1} \wedge$	
	$\mathbf{A}[(\neg \text{req0} \vee \neg \text{req1} \vee \text{ack0} \vee \text{ack1})\mathbf{W}$	
	$(\text{req0} \wedge \text{req1} \wedge \neg \text{ack0} \wedge \neg \text{ack1} \wedge \mathbf{AX} \text{ack0})] \wedge - \phi_0$	
	$\mathbf{AG} ($	
	$(\neg \text{ack0} \vee \neg \text{ack1}) \wedge$	$- \phi_1$
20	$(\neg \text{req0} \wedge \neg \text{req1} \rightarrow \mathbf{AX}(\neg \text{ack0} \wedge \neg \text{ack1})) \wedge$	$- \phi_2$
	$(\text{req0} \wedge \neg \text{req1} \rightarrow \mathbf{AX} \text{ack0}) \wedge$	$- \phi_3$
	$(\neg \text{req0} \wedge \text{req1} \rightarrow \mathbf{AX} \text{ack1}) \wedge$	$- \phi_4$
	$(\text{req1} \wedge \text{ack0} \rightarrow \mathbf{AX} \text{ack1}) \wedge$	$- \phi_5$
	$(\text{req0} \wedge \text{ack1} \rightarrow \mathbf{AX} \text{ack0}) \wedge$	$- \phi_6$
25	$(\text{req0} \wedge \text{req1} \wedge \neg \text{ack0} \wedge \neg \text{ack1} \rightarrow \mathbf{AX}(\text{ack0} \rightarrow$	
	$\mathbf{A}[(\neg \text{req0} \vee \neg \text{req1} \vee \text{ack0} \vee \text{ack1})\mathbf{W}$	
	$(\text{req0} \wedge \text{req1} \wedge \neg \text{ack0} \wedge \neg \text{ack1} \wedge \mathbf{AX} \text{ack1})]) \wedge - \phi_7$	
	$(\text{req0} \wedge \text{req1} \wedge \neg \text{ack0} \wedge \neg \text{ack1} \rightarrow \mathbf{AX}(\text{ack1} \rightarrow$	

$$\mathbf{A}[(\neg \text{req0} \vee \neg \text{req1} \vee \text{ack0} \vee \text{ack1})\mathbf{W} \\ (\text{req0} \wedge \text{req1} \wedge \neg \text{ack0} \wedge \neg \text{ack1} \wedge \mathbf{AX}\text{ack0})]])) \neg \phi_8$$

This representation uses the temporal operators **X** ("next state"), **W** ("weak until," i.e., remains true until), and **G** ("globally"), along with the quantifier **A** ("for all paths"). It is noted that  $\mathbf{AG}\phi \equiv \mathbf{A}[\phi\mathbf{W}\text{false}]$ .

Fig. 3 is a state diagram that schematically illustrates a tableau 50, or state machine, corresponding to the properties of the safety formula in Table II, in accordance with a preferred embodiment of the present invention. The tableau is preferably a "reduced tableau," as defined in Appendix A, which is most preferably constructed automatically, using a computer program that receives the properties as its input and implements the tableau construction algorithm listed in the appendix. The tableau is used, as described further hereinbelow, to verify that the properties completely cover the states and transitions of the device model defined in Table I.

Tableau 50 comprises six state groups 52, 54, 56, 58, 60 and 62. Each of the groups includes a number of states 64 that correspond to a particular output condition of device 40, i.e., in groups 52 and 60,  $\text{ack0}$  is asserted; in groups 54 and 62,  $\text{ack1}$  is asserted; and in groups 56 and 58, neither output is asserted ( $\neg \text{ack0} \neg \text{ack1}$ ). In state groups 52, 54 and 56, the non-observable variable  $\text{robin} = 0$ , whereas in groups 58, 60 and 62,  $\text{robin} = 1$ . As indicated by an arrow 66, operation of device 40 begins in group 56, with  $\neg \text{ack0}$ ,  $\neg \text{ack1}$  and  $\text{robin} = 0$ . Transitions from one state to

another depend on the choice of inputs, which are marked in each state 64. Thus, for example, when req1 is asserted in state group 52, a transition is invoked to group 54, in which ack1 is asserted.

5       Tableau 50 is a sort of virtual device, corresponding to actual target device 40. Appendix B accordingly contains source code in VHDL representing a tableau similar to tableau 50 as a device model. In preferred embodiments of the present invention, this  
10       virtual device is tested to determine whether its states and transitions correspond exactly to those of the actual device, or equivalently whether the behavior of the virtual device under all possible combinations of input conditions is identical to that of the model of the  
15       actual device. If differences are found, they are then indicative either that the tableau (and hence the specified properties) are incomplete or that the model itself is incomplete. Methods and criteria for testing tableau 50 are described further hereinbelow.

20       Fig. 4 is a flow chart that schematically illustrates a method for verifying a specification of model checking properties by comparing tableau 50 with device 40, in accordance with a preferred embodiment of the present invention. The method begins with  
25       preparation of the specification, such as the formula  $\psi$  listed in Table II, and checking the device model M to ensure that the model satisfies the specification, i.e., that  $M \models \psi$ . The specification is then used to construct the tableau. As shown in Fig. 2, tableau 50 as a virtual  
30       device model has virtual inputs 72 and outputs 74, corresponding respectively to inputs 42 and outputs 44 of implementation model 40 of the target device. For the

purpose of testing the tableau against the implementation model, the tableau inputs are labeled REQ0\_SPEC and REQ1\_SPEC, and the tableau outputs are labeled similarly, ACK0\_SPEC and ACK1\_SPEC.

5        These input and output labels are inserted in a representation of the tableau, preferably in the form of suitable program code, as listed in Appendix B. IBM RuleBase, as described hereinabove, is capable of translating the VHDL code in Appendix B into the SMV language used by model checkers. In the example shown in Appendix B, the model of device 40 is simplified, relative to the definition in Tables I and II, in that the non-observable variable "robin" is not used. Instead, ack0 always receives priority when a state in which there is no active request is followed by two active requests.

10        In order to test the tableau against the device model, a new model is created, combining the original implementation model and the virtual device model of the tableau. Inputs 72 of tableau 50 are tied to the corresponding inputs 42 of implementation model 40, so that the implementation model and the tableau model will receive the same input signals. The new, combined model is then input to an automatic model checking program, such as SMV. The model checker is asked to verify that the following properties regarding the combined model outputs are always true of the combined model:

20        ACK0==ACK0\_SPEC  
30        ACK1==ACK1\_SPEC

Alternatively, in certain cases, the two outputs may be checked separately, rather than in a single pass of the model checker, using separate tableaux corresponding to subsets of the specification properties that influence the particular outputs.

If the above-mentioned properties of the combined model outputs are confirmed, tableau 50 is assured of representing a complete and correct specification of device 40. If the tableau specification is not sufficiently detailed, then the tableau outputs ACKi\_SPEC will not be as constrained as the model outputs ACKi, and there will be some combination of inputs under which ACKi\_SPEC will have two possible values when ACKi can have only one. This outcome will generally lead engineer 24 to conclude that an additional constraint is required, i.e., that a further property is needed in the specification. Typically, a suitable property is added and the specification is re-checked, repeating the steps described above. If now  $ACKi == ACKi\_SPEC$ , then the specification can be considered complete and correct. Alternatively, it may turn out that evaluation of the model and specification in this manner will lead engineer 24 to conclude that there is an error in the implementation model, such as a missing state or transition, which causes the outputs of the model and the tableau differ. It is a further advantage of automatic model checking programs that they provide evidence of such errors, in the form of "counter-examples," that assist the engineer in identifying and correcting the error.

Fig. 5 is a flow chart that schematically illustrates another method for verifying a model checking

specification, in accordance with a preferred embodiment of the present invention. The method begins, like the method of Fig. 4, with preparation of a specification of model properties and model checking to determine that the model satisfies the specification. The specification is then used to create a corresponding tableau, which is evaluated against the device implementation model. The method of Fig. 5 differs from the method of Fig. 4 in the manner in which the tableau is evaluated, as described hereinbelow. Whereas the method of Fig. 4 is useful primarily in checking deterministic models, the method of Fig. 5 can be used for substantially any model, including non-deterministic models.

In order to evaluate the tableau against the model, a simulation preorder, SIM, is calculated for the model and the tableau. SIM is a relation between the model M and the tableau T ( $SIM \subseteq M \times T$ ) containing pairs of states  $(s_i, s_t)$  in M and T, respectively. SIM satisfies the following requirements:

- For every initial state  $s_{0i}$  of M, there is an initial state  $s_{0t}$  of T, such that  $(s_{0i}, s_{0t})$  belongs to SIM.
- For every pair of states  $(s_i, s_t)$  in SIM, state  $s_i$  is characterized by the same set of atomic propositions as  $s_t$  (i.e., the same values of the variables ACK<sub>i</sub> and REQ<sub>i</sub> in the example of device 40).
- For every state-to-state transition from state  $s_i$ , there is a corresponding transition for state  $s_t$  (although not necessarily a one-to-one correspondence).

Formally, an algorithm for the computation of SIM is presented in Table III, below, in pseudocode form. Here  $S_i(s_i)$  is the set of all values of states in  $M$ , and  $S_t(s_t)$  is the set of all values of states in  $T(\phi)$ .  $R_i(s_i, s_i')$  is the transition relation of  $M$ , and  $R_t(s_t, s_t')$  is the transition relation of  $T(\phi)$ .  $L_i(s_i)$  is a labeling function that computes the values of atomic propositions, AP, of a state  $s_i$  of  $M$ , while  $L_t(s_t)$  is a labeling function that computes the values of atomic propositions, AP, of a state  $s_t$  of  $T(\phi)$ .

TABLE III

*Init:*

$SIM_0(s_i, s_t) := \{(s_i, s_t) \in S_i \times S_t \mid L_i(s_i) = L_t(s_t)\}; j := 0$

*Repeat*{

$SIM_{j+1} := \{(s_i, s_t) \mid$

$\forall s_i' (R_i(s_i, s_i') \rightarrow \exists s_t' (R_t(s_t, s_t') \wedge SIM_j(s_i', s_t')) \wedge SIM_j(s_i, s_t)\}$

$j := j + 1$

$\}$  until  $SIM_j = SIM_{j-1}$

$SIM := SIM_j$

Preferably, for efficient computation,  $S_i$ ,  $S_t$ ,  $R_i$ ,  $R_t$ ,  $L_i$ ,  $L_t$  and  $SIM_j$  are all represented as Ordered Binary Decision Diagrams (OBDDs). This type of representation, using connected, directed, acyclic graphs, is known in the art of model checking. The use of OBDDs in this regard is described, for example, by McMillan in *Symbolic Model Checking* (Kluwer Academic Press, Norwell, Massachusetts, 1993), which is incorporated herein by reference.



All of the operations shown in Table III are well known for OBDDs, except for the computation of  $SIM_{j+1}$ . To state this computation in OBDD terms, we define the following OBDD operations:

5

$$\begin{aligned} compose(\bar{y}, \bar{u}) &\equiv \exists \bar{x}(a(\bar{x}, \bar{y}) \wedge b(\bar{x}, \bar{u})) \\ compose\_odd(\bar{y}, \bar{u}) &\equiv \exists \bar{x}(a(\bar{y}, \bar{x}) \wedge b(\bar{u}, \bar{x})) \end{aligned}$$

10 These two operations operate on two OBDDs,  $a$  and  $b$ , over three vectors of  $n$  variables,  $\bar{x}$ ,  $\bar{y}$  and  $\bar{u}$ . In these terms, the computation of  $SIM_{j+1}$  is given by:

$$\begin{aligned} SIM_{j+1}(\bar{s}_i, \bar{s}_t) &:= \neg compose\_odd(R_i(\bar{s}_i, \bar{s}_i'), \\ &\neg compose\_odd(R_t(\bar{s}_t, \bar{s}_t'), SIM_j(\bar{s}_i', \bar{s}_t')) \wedge SIM_j(\bar{s}_i, \bar{s}_t) \end{aligned}$$

15

Based on the simulation preorder  $SIM$ , a reachable simulation preorder for  $M$  and  $T$ ,  $ReachSIM$ , is determined.  $T$  may contain paths by which a state  $s$  is reached from an initial state, which do not have corresponding permissible paths in  $M$ .  $ReachSIM \subseteq SIM$  contains only  
20 pairs of states  $(s_i, s_t)$  characterized in that states  $s_i$  and  $s_t$  are reached by corresponding paths  $\pi_i$  and  $\pi_t$  from corresponding initial states. A path  $\pi_i = s_{0i}, s_{1i}, \dots, s_i$ , and a path  $\pi_t = s_{0t}, s_{1t}, \dots, s_t$  are considered to correspond if every pair of states  $(s_i, s_t)$  along the paths  
25 belongs to  $SIM$ . Details of the computation of  $ReachSIM$  are presented in Table IV:

TABLE IV

*Init:*

$ReachSIM_0 := (S_{0i} \times S_{0t}) \cap SIM; j := 0$

Repeat{

$ReachSIM_{j+1} := \{(s_i', s_t') \mid \exists s_i, s_t (ReachSIM_j(s_i, s_t) \wedge R_i(s_i, s_i') \wedge$

$R_t(s_t, s_t') \wedge SIM(s_i', s_t'))\} \cup ReachSIM_j$

$j := j+1$

5 } until  $ReachSIM_j = ReachSIM_{j-1}$

$ReachSIM := ReachSIM_j$

Here, too, if  $S_i, S_t, R_i, R_t, L_i, L_t$  and  $ReachSIM_j$  are all OBDDs, then all of the operations in Table IV are well  
10 known, except for the computation of  $ReachSIM_{j+1}$ , which is given in OBDD terms by:

$ReachSIM_{j+1}(\bar{s}_i, \bar{s}_t) := (compose(compose(ReachSIM_j(\bar{s}_i, \bar{s}_t)$

$R_i(\bar{s}_i, \bar{s}_i'), R_t(\bar{s}_t, \bar{s}_t')) \wedge SIM(\bar{s}_i', \bar{s}_t')) \vee ReachSIM_j(\bar{s}_i', \bar{s}_t')$

15         $ReachSIM$  thus identifies a set of states in  $T$  having transitions that correspond to the actual transitions in  $M$ . There may yet be, however, states or transitions in  $T$  that do not have corresponding states or transitions in  $M$ , meaning that the specification does not constrain the  
20 implementation model tightly enough, so that one or more additional properties are needed. Such states and transitions are referred to herein as being "unimplemented." There may likewise be states in  $T$  that correspond simultaneously to two or more states in  $M$ .  
25 Such discrepancies are detected using  $ReachSIM$  to evaluate the following criteria (preferably using OBDD operations), either serially or in parallel:

- Unimplemented start states:

$$\{s_t \in S_{0t} \mid \forall s_i \in S_{0i} [(s_i, s_t) \notin \text{ReachSIM}]\}$$

These are initial tableau states that have no corresponding initial states in the model (and therefore are absent from ReachSIM). The existence of an unimplemented start state indicates either that the specification does not adequately constrain the start states, or that the model is lacking a required initial state.

- Unimplemented states:

$$\{s_t \in S_t \mid \forall s_i \in S_i [(s_i, s_t) \notin \text{ReachSIM}]\}$$

The existence of a state anywhere in the tableau that is not included in ReachSIM indicates either that the specification is lacking in constraints or that a meaningful state of the device is not implemented in the model.

- Unimplemented transitions:

$$(s_t, s_t') \in R_t \mid \exists s_i, s_i' \in S_i,$$

$$(s_i, s_t) \in \text{ReachSIM}, (s_i, s_t') \in \text{ReachSIM}, (s_i, s_i') \notin R_i\}$$

These are transitions between states of the tableau for which there is no corresponding transition in the model. The states belong to ReachSIM, so that they have corresponding states in the model, which are reached by corresponding paths. The existence of an unimplemented transition indicates either that the specification is not tight enough or that a required transition, between reachable implementation states, was not implemented in the model. Assuming  $S_i$ ,  $R_i$ ,  $R_t$  and ReachSIM are all OBDDs, the set of unimplemented transitions can be represented by the following equation:

$nimplementedTransition(\bar{s}_t, \bar{s}_t') := compose($

$compose(\neg R_i(\bar{s}_i, \bar{s}_i'), ReachSIM(\bar{s}_i, \bar{s}_t)), ReachSIM(\bar{s}_i', \bar{s}_t')) \wedge R_t(\bar{s}_t, \bar{s}_t')$

- Many-to-one mapping:

$$s_t \in S_t \mid \exists s_{1i}, s_{2i} \in S_i$$

$$(s_{1i}, s_t) \in ReachSIM, (s_{2i}, s_t) \in ReachSIM, s_{1i} \neq s_{2i}$$

In this case, there may be a tableau state to which multiple implementation states are mapped, i.e., a state  $s$  which is paired in  $ReachSIM$  with at least two different model states  $s_i'$  and  $s_j'$ . The existence of a many-to-one state indicates either that the specification is not sufficiently detailed, or that the implementation contains redundancies. If  $ReachSIM$  and the model states are OBDDs, the set of many-to-one states can be represented by:

$$ManyToOne(\bar{s}_t) = \exists v_1 (ReachSIM(\bar{s}_1, \bar{s}_t) \wedge compose((\bar{s}_1 \neq \bar{s}_2) \\ ReachSIM(\bar{s}_2, \bar{s}_t))$$

If the first three of these four criteria return empty results, then  $T$  is a complete specification of  $M$ . Any dissimilarity between the tableau and the implementation will result in a non-empty result. Preferably, the tableau  $T$  that is used in this method is a reduced tableau, as defined in Appendix A, since traditional (non-reduced) tableaux typically contain redundancies, which are removed in the reduced tableau. If the first three of the criteria above hold (i.e., return empty results),  $T$  and  $M$  are bisimilar, and the fourth criterion is not necessary to establish the completeness of  $T$ . It may, however, indicate that there are redundancies in the implementation.

As noted hereinabove, verification of specification properties vis-a-vis the implementation model, using any of the methods described herein, is preferably carried out using software for this purpose running on processor 22. Software for use in such verification is preferably supplied as component of a simulation and model checking software package. Alternatively, the software for tableau construction and verification is provided as an independent software package. In either case, the software may be conveyed to processor 22 in intangible form, over a network, for example, or on tangible media, such as CD-ROM.

Although preferred embodiments are described hereinabove with reference to certain methods and languages used in model checking, it will be understood that the application of the present invention is not limited to any particular language or method of implementation. Those skilled in the art will appreciate that the principles of the present invention may similarly be used in other areas of verification, not only for electronic devices, but also in verification of other types of target systems, as well, for example, transportation systems or complex valve manifolds. It will thus be understood that the preferred embodiments described above are cited by way of example, and the full scope of the invention is limited only by the claims.

## APPENDIX A

## 1 Reduced Tableau for ACTL

In this section we define a *reduced tableau* for the subset of ACTL safety formulas. We follow the definition of the reduced tableau for LTL presented in [3]. A tableau is a special form of a Kripke structure, consisting of states labeled with atomic propositions and transitions between the states. As is often the case with tableaux for temporal logics (e.g. [2, 1]), a state of the tableau consists of a set of formulas that are supposed to hold along all paths leaving the state. Unlike typical tableaux, however, the formulas in the states of the reduced tableau are interpreted over a three-valued domain. Thus, a state may include a formula or its negation, or none of the two. If the latter occurs, it reflects a “don’t care” situation, i.e., the formula may be either true or false in the state.

Similarly to [2], we wish the reduced tableau for a formula  $\psi$  to satisfy  $\phi$ . Furthermore, it should be greater by the *simulation preorder* [4] than any Kripke structure that satisfies  $\psi$ . In order to achieve these goals we will adapt both definitions of  $\models$  and simulation preorder to be applicable to three-valued structures. Below we present the formal definitions of the tableau and of the adapted relations.

Let  $AP_\psi$  be the set of atomic propositions in an ACTL formula  $\psi$ .

**Definition 1.1 (sub-formulas)** *The set of sub-formulas of  $\psi$  is defined recursively as follows :*

1.  $sub(p) = \{p\}$  and  $sub(\neg p) = \{\neg p\}$ , if  $p \in AP_\psi$
2.  $sub(\varphi) = \{\varphi\} \cup sub(g_1) \cup sub(g_2)$ , if  $\varphi = g_1 \wedge g_2$  or  $\varphi = g_1 \vee g_2$ .
3.  $sub(AXg_1) = \{AXg_1\} \cup sub(g_1)$

$$4. \text{sub}(A[g_1 W g_2]) = \{A[g_1 W g_2], AXA[g_1 W g_2]\} \cup \text{sub}(g_1) \cup \text{sub}(g_2)$$

We will distinguish between  $\alpha$ -formulas and  $\beta$ -formulas, which are conjunctions and disjunctions, respectively. In the reduced tableau, if a state satisfies a conjunction, then it also satisfies its two conjuncts. On the other hand, if it satisfies a a disjunction, it will usually satisfy only one of the disjunct, leaving the other as “don’t care”.

**Definition 1.2 ( $\alpha$ -formula)**

A formula  $g \in \text{sub}(\psi)$  is an  $\alpha$ -formula if  $g = g_1 \wedge g_2$ .

**Definition 1.3 ( $\beta$ -formula)**

A formula  $g \in \text{sub}(\psi)$  is a  $\beta$ -formula if :

1.  $g = g_1 \vee g_2$ , in which case  $k_1(g) = \{g_1\}$  and  $k_2(g) = \{g_2\}$ .
2.  $g = A[g_1 W g_2]$ , in which case  $k_1(g) = \{g_2\}$  and  $k_2(g) = \{g_1, AXA[g_1 W g_2]\}$ .

**Definition 1.4 (A particle)** A set of formulas  $P$  is a particle if:

1.  $P \subseteq \text{sub}(\psi)$
2.  $p \in P \rightarrow \neg p \notin P$
3.  $\neg p \in P \rightarrow p \notin P$
4.  $P$  does not contain any  $\alpha$ -formula nor any  $\beta$ -formula.

**Definition 1.5 (Implied successor)** A formula  $g$  is an implied successor of a particle  $P$  if  $AXg \in P$ . We denote by  $\text{imps}(P)$  the set of implied successors of  $P$ , i.e.,  $\text{imps}(P) = \{g | AXg \in P\}$

Note that if  $P$  does not include any formula of the form  $AXg$  then  $\text{imps}(P) = \{\}$ . The particle  $\{\}$  means that the state reached has no commitments to satisfy any of the formulas. Thus, it may be the start of any

possible paths. Furthermore, it may simulate any state. We later see that the only son of particle  $\{\}$  is the particle  $\{\}$  itself.

function *Remove\_Redandant*( $S$  : Set of Particles) : returns Set of Particles  
 return the largest set such that  $\{P \in S | \forall P_i \in S, P_i \not\subset P\}$

recursive function *cover<sub>p</sub>*( $B$  : Set of formulas) returns : Set of particles  
 if  $B$  is not locally consistent then return  $\{\}$  – no particles contain  $B$   
 if there exists some  $\alpha$ -formula  $r = r_1 \wedge r_2$  in  $B$   
     then return *cover<sub>p</sub>*( $B - \{r\} \cup \{r_1, r_2\}$ )  
 if there exists some  $\beta$ -formula  $r$  such that  $r \in B$  then return  
     *cover<sub>p</sub>*( $B - \{r\} \cup k_1(r)$ )  $\cup$  *cover<sub>p</sub>*( $B - \{r\} \cup k_2(r)$ )  
 return  $\{B\}$  –  $B$  is a particle  
 end function

**Definition 1.6** (*Successors<sub>p</sub>*( $P$ ))  
*Successors<sub>p</sub>*( $P$ ) = *Remove\_Redandant*(*cover<sub>p</sub>*(*imps*( $P$ ))) .

We now describe an iterative algorithm PART\_TAB that produces the tableau structure.



**Algorithm : PART\_TAB**

$S_{\tau_0} := \text{Remove\_Redandant}(\text{cover}_p(\{\psi\}))$   
 $S_\tau := S_{\tau_0}$   
 $R_\tau := \emptyset$   
 Mark all particles in  $S_\tau$  as unprocessed  
 For each unprocessed particle  $P$  in  $S_\tau$  do  
    $S := \text{successors}_p(P)$ ;  
   For each  $Q \in S$   
     Add  $(P, Q)$  to  $R_\tau$ ;  
     Define  $L(P) = P \cap \{p | p \in AP_\psi\} \cap \{\neg p | p \in AP_\psi\}$   
     If  $Q \notin S_\tau$ ;  
       Add  $Q$  to  $S_\tau$ ;  
       Mark  $Q$  as unprocessed;  
     end for  
   Mark  $P$  as processed;  
 end for  
end for

Note that a state is labeled by propositions from AP and by their negations. Since a state is a particle, it will never contain both a proposition and its negation, but it may contain none of them.

We now prune the structure we received, such that any particle has at least one successor.

**Algorithm : PRUNE\_TAB**

Mark all particles in  $S_\tau$  as unprocessed  
 Repeat until all particles in  $S_\tau$  are processed  
   For each unprocessed particle  $P$  in  $S_\tau$  do  
     If  $P$  has no successors  
       Remove  $P$  from  $S_\tau$   
       Remove any edge going to  $P$  from  $R_\tau$   
       Mark the remaining particles in  $S_\tau$  as unprocessed  
       Skip  
     Mark  $P$  as processed;  
 end for  
end Repeat

After activating PART\_TAB and PRUNE\_TAB we have produced the tableau  $\tau(\psi) = \langle S_\tau, S_{\tau 0}, R_\tau, L_\tau \rangle$  for  $\psi$ .

Note that the tableau we construct is total. Any particle that has no successors is removed.

**References**

- [1] E. M. Clarke, O. Grumberg, H. Hiraishi, S. Jha, D. L. Long, K. L. McMillan, and L. A. Ness. Verification of the Futurebus+ Cache Coherence Protocol. In *Proceedings of the 11th International Conference on Computer Hardware Description Languages*, pages 15–30, 1993.
- [2] O. Grumberg and D.E. Long. Model checking and modular verification. *ACM Trans. on Programming Languages and Systems*, 16(3):843–871, 1994.

- [3] Z. Manna and A. Pnueli. *Temporal verifications of Reactive Systems - Safety*. Springer-Verlag, 1995.
- [4] R. Milner. An algebraic definition of simulation between programs. In *In proceedings of the 2nd International Joint Conference on Artificial Intelligence*, pages 481-489, September 1971.

002290"4EE50960

## APPENDIX B

The following is a program listing in VHDL describing a tableau that corresponds generally to the properties of arbiter 40 listed in Table II. As noted  
 5 hereinabove, however, the listing below is based on a simplified model without the non-observable variable "robin." In place of the output names ACK0\_SPEC and ACK1\_SPEC shown in Fig. 2, the names ack0\_new and ack1\_new are used in the listing; and req0 and req1 in  
 10 the listing correspond respectively to REQ0\_SPEC and REQ1\_SPEC.

```

library ieee;
use ieee.std_logic_1164.all;

15  entity full_spec is
    port (
        rb_clock           : in std_ulogic;
        ack0_new           : in std_ulogic;
        20  ack1_new        : in std_ulogic;
        req0               : in std_ulogic;
        req1               : in std_ulogic;
        reset              : in std_ulogic;
        fails              : out
        25                std_ulogic_vector(0 to 5)
    );

    end full_spec;

30  architecture rb of full_spec is
    signal not_rb_reset: std_ulogic ;
  
```

```

signal rb_reset      : std_ulogic ;
type rb_enum_type is (iu_enum_slash_err,
                      iu_enum_slash_z);

```

```

5  begin

```

```

    p:
    process
    begin

```

```

10      wait until rb_clock'event and rb_clock='1';
        not_rb_reset <= '1';
    end process;
    rb_reset <= reset or (not not_rb_reset);

```

```

15

```

```

    f1:
        fails(0) <= not b2l((((not ack0_new) or (not
                                ack1_new))) /= '0')
        or (rb_reset /= '0') or (rb_clock /= '1'));

```

```

20

```

```

    f2:
    block

```

```

        constant n: integer := 4;
        signal v: std_ulogic_vector(0 to n-1) :=
            "1110";

```

```

25

```

```

        signal v_out: std_ulogic_vector(0 to n-1);
        signal vnext: std_ulogic_vector(0 to n-1);
        signal ok: std_ulogic := '1';

```

```

    begin

```

```

        v_out(0) <= '0';
30      v_out(1) <= v(1) and ('1');
        v_out(2) <= v(2) and (((not req0) and (not
                                req1)));

```

35519S3

```
v_out(3) <= v(3) and ((not ((not ack0_new) and
(not ack1_new))));
```

```
vnnext(0) <= '0';
5 vnnext(1) <= v_out(1);
vnnext(2) <= v_out(1);
vnnext(3) <= v_out(2);
```

```
10 p:
process
begin
wait until rb_clock'event and rb_clock='1';
if rb_reset = '1' then
15 v <= "1110";
ok <= '1';
else
if (not (v(3) and (not ((not ack0_new)
and (not ack1_new))
))) = '0' then
20 ok <= '0';
elsif ok = '0' then
ok <= '1';
end if;

25 v <= vnnext;
end if;
end process;
```

```
30 fails(1) <= not b2l ((ok /= '0') or (rb_reset
/= '0')
or (rb_clock /= '1'));
```

```
end block;
```

```
f3:
```

```
block
```

```

5      constant n: integer := 4;
      signal v: std_ulogic_vector(0 to n-1) :=
          "1110";
      signal v_out: std_ulogic_vector(0 to n-1);
      signal vnext: std_ulogic_vector(0 to n-1);
10     signal ok: std_ulogic := '1';
begin
    v_out(0) <= '0';
    v_out(1) <= v(1) and ('1');
    v_out(2) <= v(2) and ((req0 and (not ack0_new)));
15    v_out(3) <= v(3) and ((not ack0_new));

    vnext(0) <= '0';
    vnext(1) <= v_out(1);
    vnext(2) <= v_out(1);
20    vnext(3) <= v_out(2);

    p:
    process
    begin
25        wait until rb_clock'event and rb_clock='1';
            if rb_reset = '1' then
                v <= "1110";
                ok <= '1';
            else
30                if (not (v(3) and (not ack0_new))) =
                    '0' then
                    ok <= '0';

```

```

        elsif ok = '0' then
            ok <= '1';
        end if;

5          v <= vnext;
        end if;
    end process;

10      fails(2) <= not b2l ((ok /= '0') or (rb_reset
        /= '0')
        or (rb_clock /= '1'));
    end block;

15      f4:
    block
        constant n: integer := 4;
        signal v: std_ulogic_vector(0 to n-1) :=
            "1110";

20      signal v_out: std_ulogic_vector(0 to n-1);
        signal vnext: std_ulogic_vector(0 to n-1);
        signal ok: std_ulogic := '1';
    begin
        v_out(0) <= '0';
        v_out(1) <= v(1) and ('1');
25      v_out(2) <= v(2) and (((not req0) and req1));
        v_out(3) <= v(3) and ((not ack1_new));

        vnext(0) <= '0';
        vnext(1) <= v_out(1);
30      vnext(2) <= v_out(1);
        vnext(3) <= v_out(2);
    end
end f4;

```



```

p:
  process
  begin
5    wait until rb_clock'event and rb_clock='1';
      if rb_reset = '1' then
        v <= "1110";
        ok <= '1';
      else
10      if (not (v(3) and (not ack1_new))) =
          '0' then
        ok <= '0';
        elsif ok = '0' then
          ok <= '1';
15      end if;

        v <= vnext;
      end if;
  end process;

20

      fails(3) <= not b2l ((ok /= '0') or (rb_reset
          /= '0')
      or (rb_clock /= '1'));
25    end block;

f5:
  block
    constant n: integer := 4;
30    signal v: std_ulogic_vector(0 to n-1) :=
        "1110";
    signal v_out: std_ulogic_vector(0 to n-1);

```

```

    signal vnext: std_ulogic_vector(0 to n-1);
    signal ok: std_ulogic := '1';
begin
    v_out(0) <= '0';
5    v_out(1) <= v(1) and ('1');
    v_out(2) <= v(2) and ((req1 and ack0_new));
    v_out(3) <= v(3) and ((not ack1_new));

    vnext(0) <= '0';
10    vnext(1) <= v_out(1);
    vnext(2) <= v_out(1);
    vnext(3) <= v_out(2);

    p:
15    process
    begin
        wait until rb_clock'event and rb_clock='1';
        if rb_reset = '1' then
            v <= "1110";
            ok <= '1';
20        else
            if (not (v(3) and (not ack1_new))) =
                '0' then
                ok <= '0';
            elsif ok = '0' then
25                ok <= '1';
            end if;

            v <= vnext;
30        end if;
    end process;
end process;
```

```

        fails(4) <= not b2l ((ok /= '0') or (rb_reset
                               /= '0')
        or (rb_clock /= '1'));
5    end block;

```

```

f6:

```

```

block

```

```

    constant n: integer := 4;

```

```

    signal v: std_ulogic_vector(0 to n-1) :=
        "1110";

```

```

    signal v_out: std_ulogic_vector(0 to n-1);

```

```

    signal vnext: std_ulogic_vector(0 to n-1);

```

```

    signal ok: std_ulogic := '1';

```

```

begin

```

```

    v_out(0) <= '0';

```

```

    v_out(1) <= v(1) and ('1');

```

```

    v_out(2) <= v(2) and ((req0 and (not req1)));

```

```

    v_out(3) <= v(3) and ((not ack0_new));

```

```

    vnext(0) <= '0';

```

```

    vnext(1) <= v_out(1);

```

```

    vnext(2) <= v_out(1);

```

```

    vnext(3) <= v_out(2);

```

```

    p:

```

```

    process

```

```

begin

```

```

    wait until rb_clock'event and rb_clock='1';

```

```

        if rb_reset = '1' then

```

```

            v <= "1110";

```

```

            ok <= '1';

```

35519S3

```

else
    if (not (v(3) and (not ack0_new))) =
        '0' then
            ok <= '0';
5      elsif ok = '0' then
            ok <= '1';
            end if;

            v <= vnext;
10      end if;
    end process;

    fails(5) <= not b2l ((ok /= '0') or (rb_reset
15      /= '0')
        or (rb_clock /= '1'));
    end block;

end rb;
```

## CLAIMS

1 1. A method for verification, comprising:

2 providing an implementation model, which defines  
3 model states of a target system and model transitions  
4 between the model states;

5 providing a specification of the target system,  
6 comprising properties that the system is expected to  
7 obey;

8 creating a tableau from the specification, the  
9 tableau defining tableau states with tableau transitions  
10 between the tableau states in accordance with the  
11 properties; and

12 comparing the tableau transitions to the model  
13 transitions to determine whether a discrepancy exists  
14 therebetween.

1 2. A method according to claim 1, wherein creating the  
2 tableau comprises defining a finite state machine using a  
3 hardware description language.

1 3. A method according to claim 2, wherein the  
2 implementation model has model inputs and outputs, and  
3 wherein defining the finite state machine comprises  
4 describing a virtual device having inputs and outputs  
5 corresponding to the model inputs and outputs of the  
6 implementation model.

1 4. A method according to claim 3, wherein comparing the  
2 transitions comprises performing a reachability analysis  
3 using both the implementation model and the tableau while  
4 providing identical inputs to the inputs of both the  
5 implementation model and the tableau, and verifying that  
6 the outputs are always identical.

1 5. A method according to claim 4, wherein performing  
2 the reachability analysis comprises comparing the model  
3 and the tableau automatically using a model checker.

1 6. A method according to claim 4, wherein performing  
2 the reachability analysis comprises providing evidence of  
3 a tableau transition that is not implemented in the  
4 model.

1 7. A method according to claim 1, wherein comparing the  
2 tableau transitions comprises associating model  
3 transitions with corresponding tableau transitions.

1 8. A method according to claim 7, wherein associating  
2 the transitions comprises defining a reachable simulation  
3 preorder relating the model and the tableau.

1 9. A method according to claim 7, wherein associating  
2 the transitions comprises finding a tableau transition  
3 that is not implemented in the model.

1 10. A method according to claim 9, wherein finding the  
2 tableau transition that is not implemented in the model  
3 comprises deriving an indication, based on the  
4 unimplemented transition, that the specification is not  
5 complete with respect to the model.

1 11. A method according to claim 9, wherein finding the  
2 tableau transition that is not implemented in the model  
3 comprises deriving an indication, based on the  
4 unimplemented transition, that a transition of the target  
5 system is missing in the model.

1 12. A method according to claim 1, and comprising  
2 associating model states with corresponding tableau  
3 states.

1 13. A method according to claim 12, wherein associating  
2 the model states with the corresponding tableau states  
3 comprises finding a tableau state that is not implemented  
4 in the model.

1 14. A method according to claim 13, wherein finding the  
2 tableau state that is not implemented in the model  
3 comprises deriving an indication, based on the  
4 unimplemented state, that the specification is not  
5 complete with respect to the model.

1 15. A method according to claim 13, wherein finding the  
2 tableau state that is not implemented in the model  
3 comprises deriving an indication, based on the  
4 unimplemented state, that a state of the target system is  
5 missing in the model.

1 16. A method according to claim 12, wherein associating  
2 the model states with the corresponding tableau states  
3 comprises finding multiple model states corresponding to  
4 a single tableau state.

1 17. A method according to claim 1, wherein creating the  
2 tableau comprises creating a reduced tableau from which  
3 one or more redundant states have been eliminated.

1 18. A method according to claim 1, wherein comparing the  
2 transitions comprises verifying that the specification is  
3 a complete and correct description of the implementation  
4 model responsive to the comparison.

1 19. A verification processor, which is configured to  
2 receive an implementation model, defining model states of  
3 a target system and model transitions between the model  
4 states, and to receive a specification of the target

5 system, including properties that the system is expected  
6 to obey, and which is operative to create a tableau from  
7 the specification, the tableau defining tableau states  
8 with tableau transitions between the tableau states in  
9 accordance with the properties, and to compare the  
10 tableau transitions to the model transitions to determine  
11 whether a discrepancy exists therebetween.

1 20. A processor according to claim 19, which is  
2 operative to perform model checking of the implementation  
3 model.

1 21. A computer software product for verification of a  
2 specification of a target system, which specification  
3 includes properties that the system is expected to obey,  
4 by comparison with an implementation model, which defines  
5 model states of the target system and model transitions  
6 between the model states, the product comprising a  
7 computer-readable medium having computer program  
8 instructions recorded therein, which instructions, when  
9 read by a computer, cause the computer to create a  
10 tableau from the specification, the tableau defining  
11 tableau states with tableau transitions between the  
12 tableau states in accordance with the properties, and to  
13 compare the tableau transitions to the model transitions  
14 to determine whether a discrepancy exists therebetween.

1 22. A product according to claim 21, wherein the program  
2 instructions cause the computer to compare the tableau  
3 with the model by running a reachability analysis using  
4 both the implementation model and the tableau while  
5 providing identical inputs to the inputs of both the  
6 implementation model and the tableau, and verifying that  
7 the outputs are always identical.



1 23. A product according to claim 22, wherein the  
2 reachability analysis is performed using an automatic  
3 model checker.

1 24. A product according to claim 21, wherein the  
2 instructions cause the computer to verify that the  
3 specification is a complete description of the  
4 implementation model.

1 25. A method for verification, comprising:

2 providing an implementation model, which defines  
3 model states of a target system and model transitions  
4 between the model states;

5 providing a specification of the target system,  
6 comprising properties that the system is expected to  
7 obey;

8 creating a tableau from the specification, the  
9 tableau defining tableau states with tableau transitions  
10 between the tableau states in accordance with the  
11 properties; and

12 comparing the model and the tableau by inputting the  
13 model and the tableau to an automatic model checking  
14 program.

1 26. A method according to claim 25, wherein creating the  
2 tableau comprises defining a finite state machine using a  
3 hardware description language.

1 27. A method according to claim 26, wherein the input  
2 model has model inputs and outputs, and wherein defining  
3 the finite state machine comprises describing a virtual  
4 device having inputs and outputs corresponding to the  
5 model inputs and outputs of the implementation model.

1 28. A method according to claim 27, wherein comparing  
2 the model and the tableau comprises running the model  
3 checker while providing identical inputs to the inputs of  
4 both the implementation model and the tableau, and  
5 verifying that the outputs are always identical.

1 29. A method according to claim 25, wherein comparing  
2 the model and the tableau comprises providing evidence of  
3 a transition or state in the tableau that is not  
4 implemented in the model.

1 30. A method according to claim 29, wherein providing  
2 the evidence comprises providing a counter-example  
3 indicative of the unimplemented transition or state.

1 31. Model checking apparatus, which is configured to  
2 receive an implementation model, defining model states of  
3 a target system and model transitions between the model  
4 states, and to receive a specification of the target  
5 system, including properties that the system is expected  
6 to obey, and which is operative to create a tableau from  
7 the specification, the tableau defining tableau states  
8 with tableau transitions between the tableau states in  
9 accordance with the properties, and to compare the  
10 tableau to the model by inputting the model and the  
11 tableau to an automatic model checking program.

1 32. A computer software product for verification of a  
2 specification of a target system, which specification  
3 includes properties that the system is expected to obey,  
4 by comparison with an implementation model, which defines  
5 model states of the target system and model transitions  
6 between the model states, the product comprising a  
7 computer-readable medium having computer program

35519S3

8 instructions recorded therein, which instructions, when  
9 read by a computer, cause the computer to create a  
10 tableau from the specification, the tableau defining  
11 tableau states with tableau transitions between the  
12 tableau states in accordance with the properties, and to  
13 compare the tableau to the model by inputting the model  
14 and the tableau to an automatic model checking program.

IDENTIFICATION OF MISSING PROPERTIES IN MODEL CHECKING**ABSTRACT**

A method for verification includes providing an implementation model, which defines model states of a target system and model transitions between the model states, and providing a specification of the target system, including properties that the system is expected to obey. A tableau is created from the specification, the tableau defining tableau states with tableau transitions between the tableau states in accordance with the properties. The tableau transitions are compared to the model transitions to determine whether a discrepancy exists therebetween.

FIG. 1

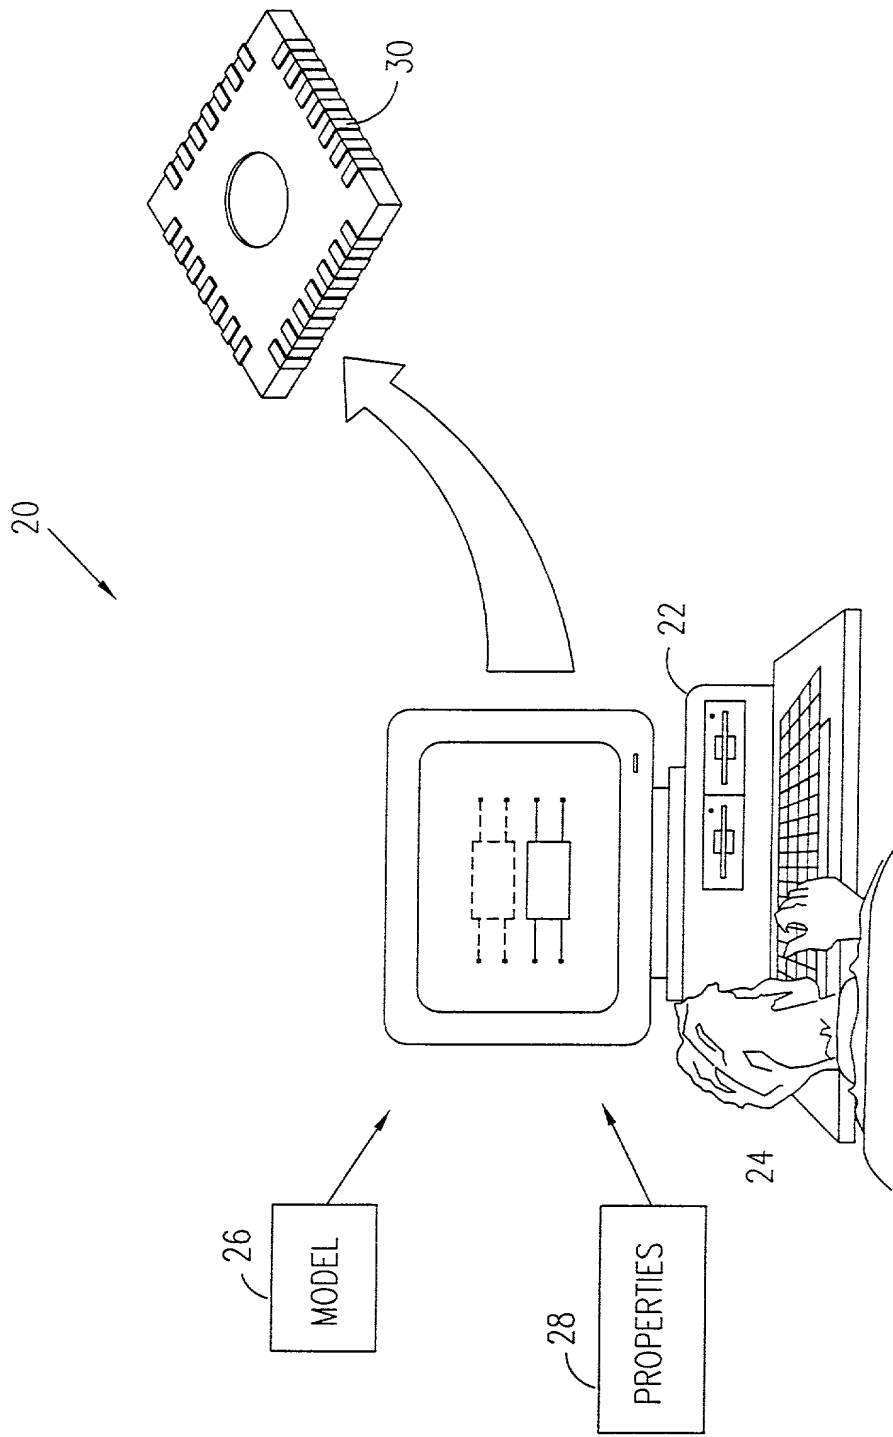




FIG. 3



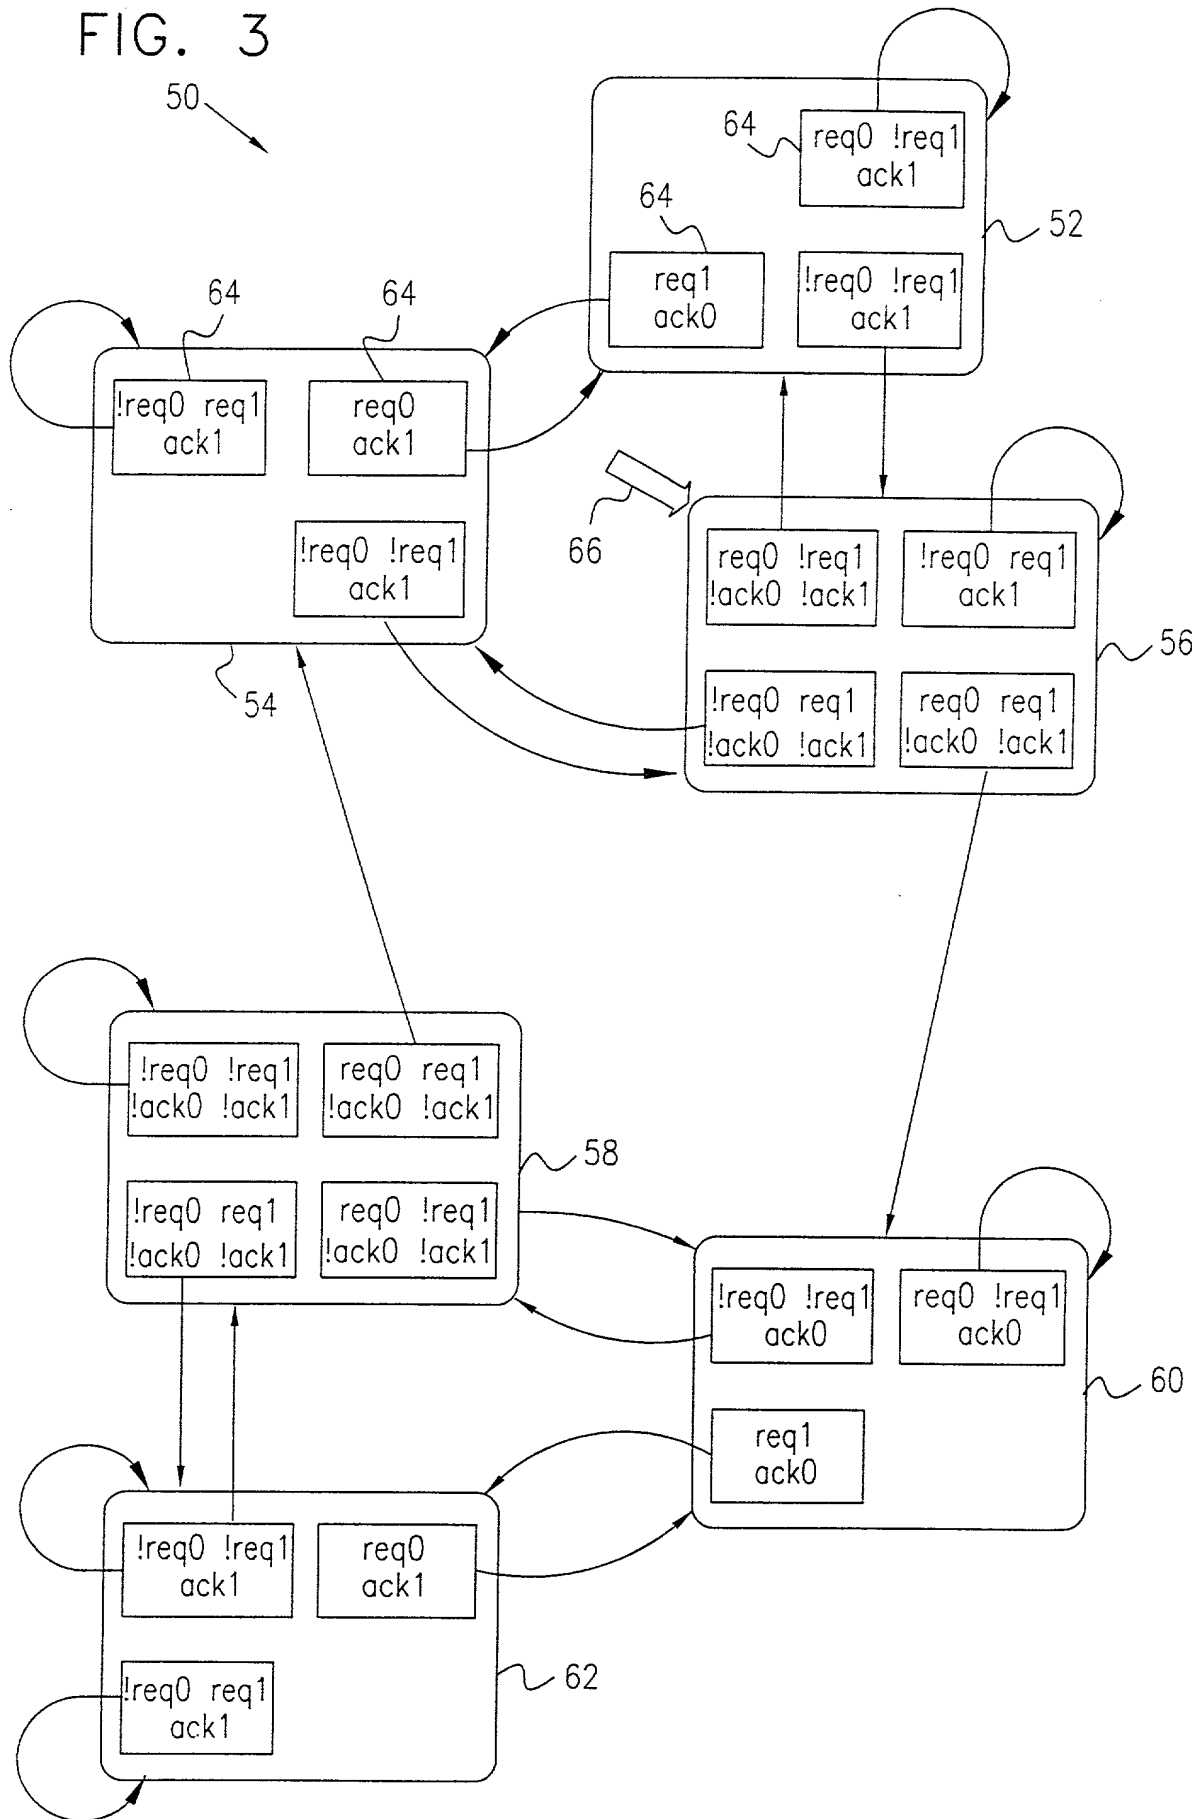


FIG. 4



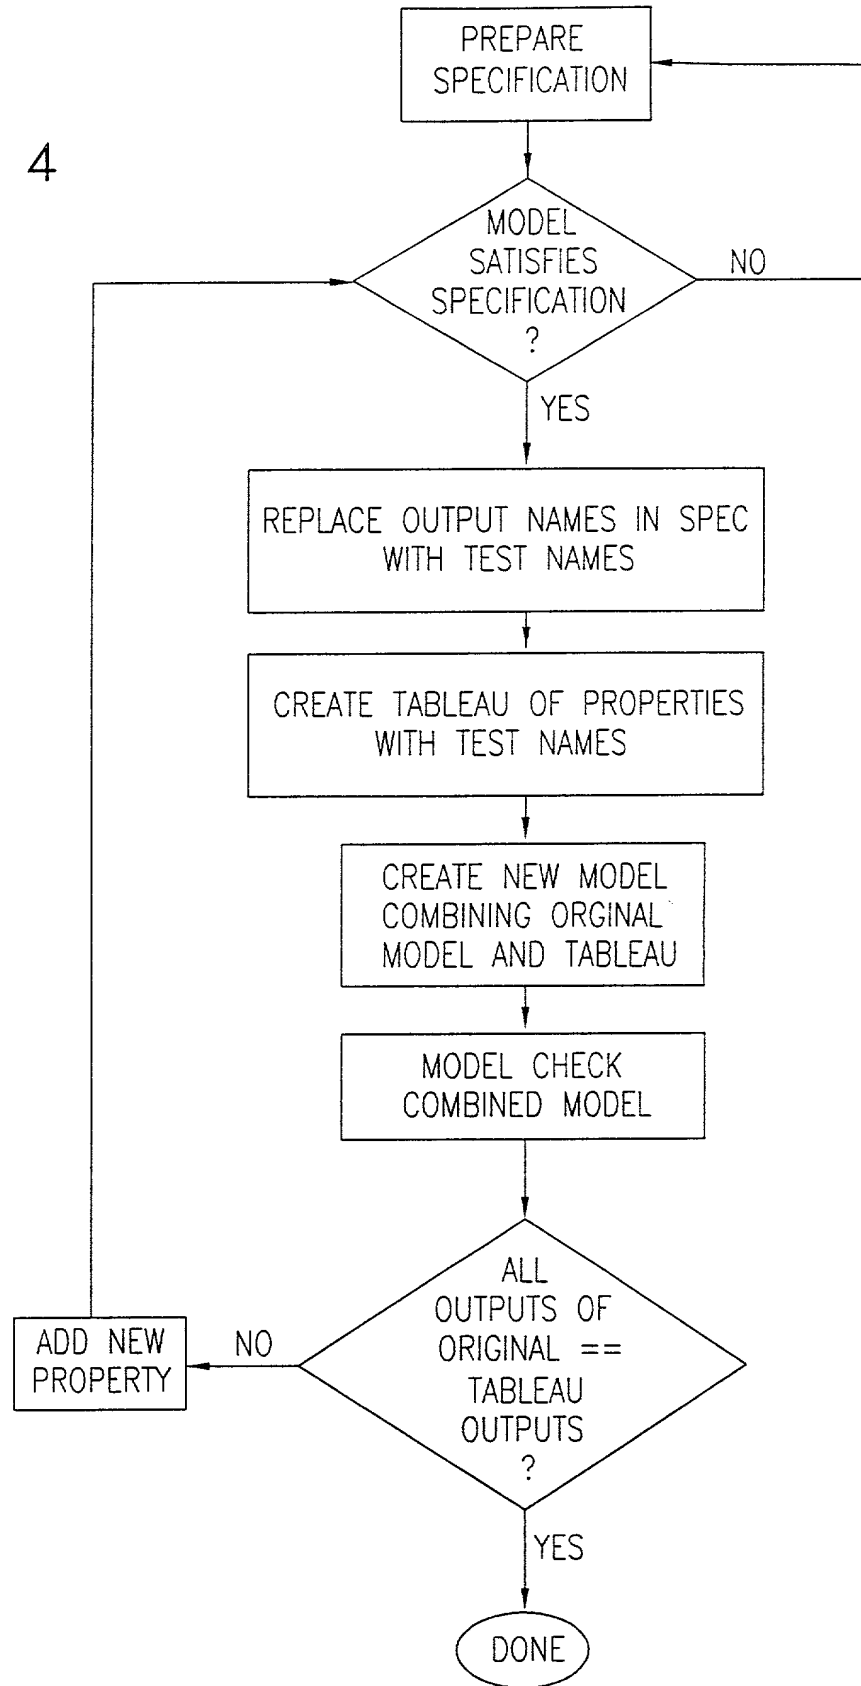

09605334.062700

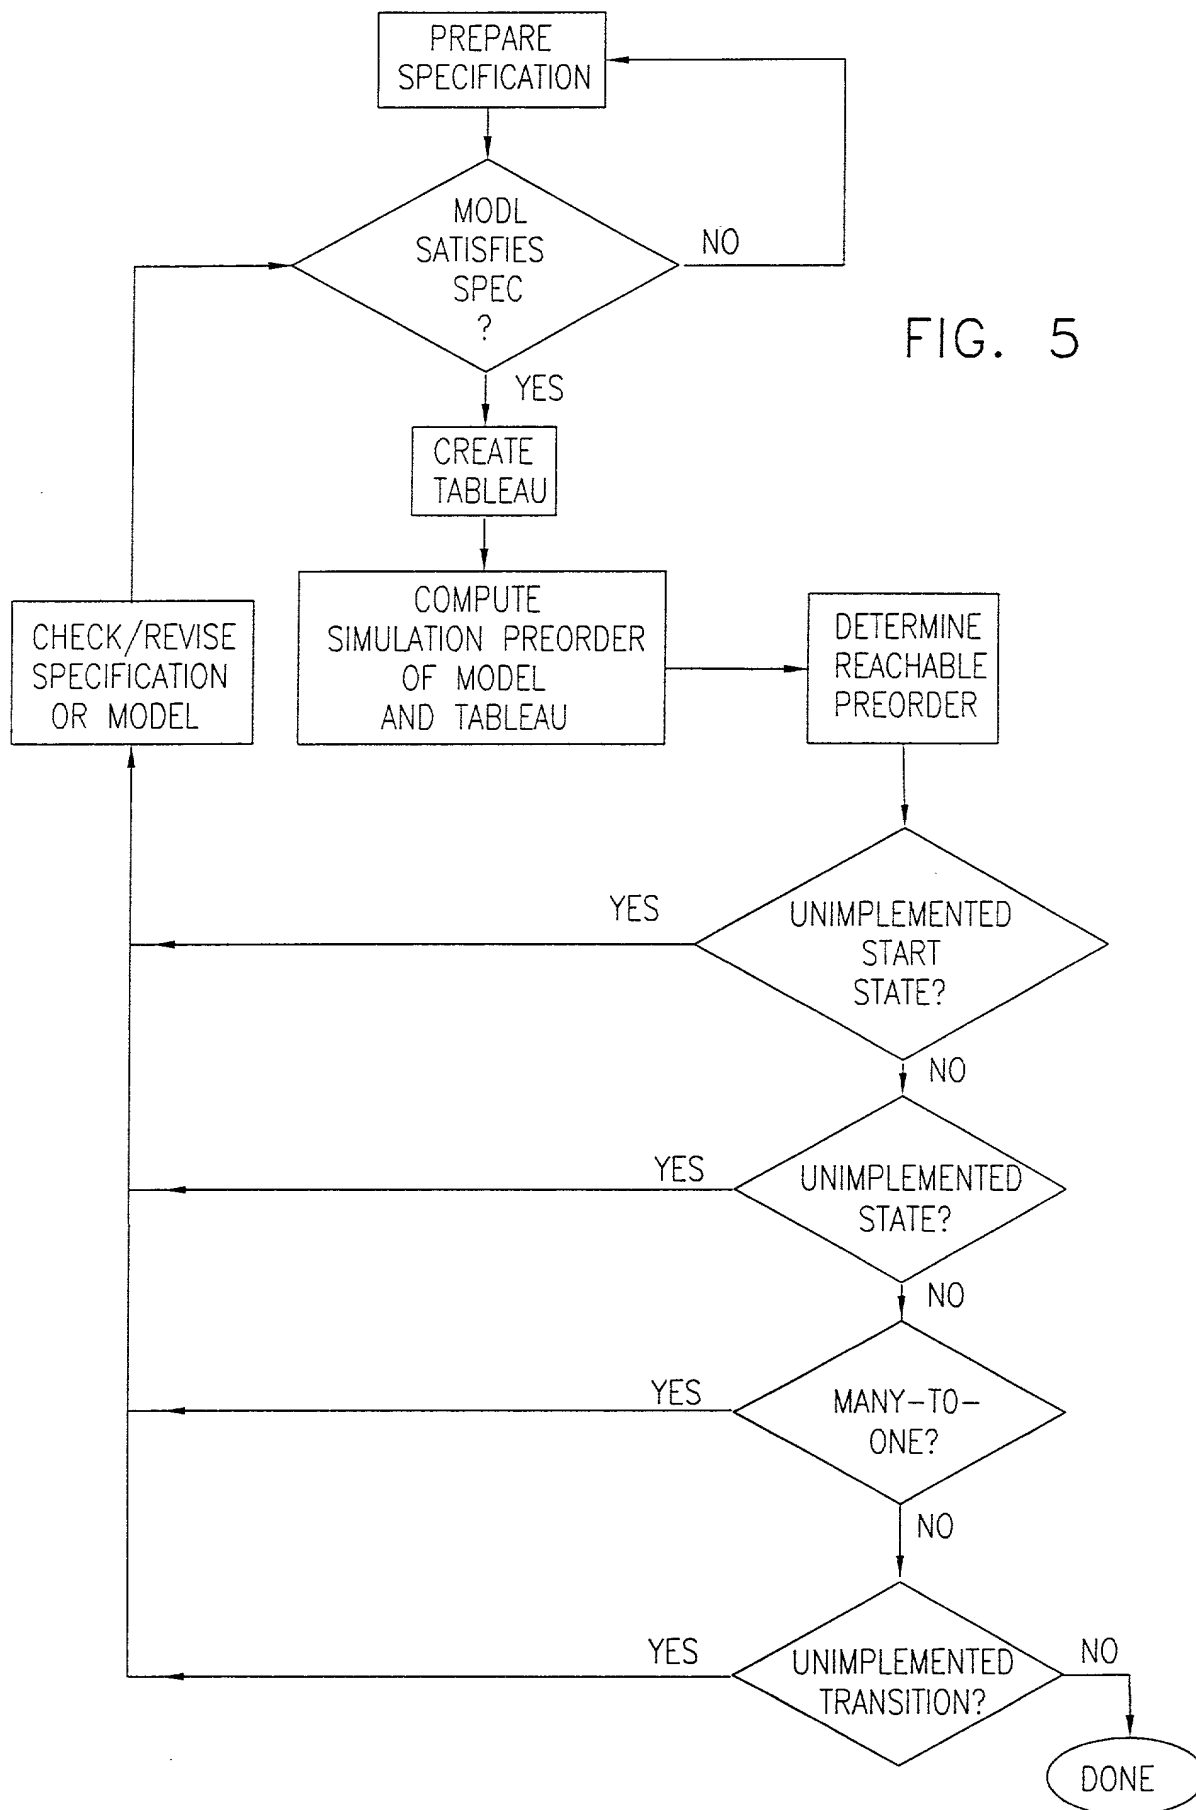

**DECLARATION  
AND POWER OF ATTORNEY  
Original Application**

As a below named inventor, I declare that the information given herein is true, that I believe that I am the original, first and sole inventor if only one name is listed at 1 below, or a joint inventor if plural inventors are named below, of the invention entitled:

**IDENTIFICATION OF MISSING PROPERTIES IN MODEL CHECKING**

which is described and claimed in:

[X] the attached specification or                      [] the specification in application  
Serial No. , filed  
(for declaration not accompanying appl.)

that I do not know and do not believe that the same was ever known or used in the United States of America before my or our invention thereof or patented or described in any printed publication in any country before my or our invention thereof, or more than one year prior to this application, or in public use or on sale in the United States of America more than one year prior to this application, that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months prior to this application, that I acknowledge my duty to disclose information of which I am aware which is material to patentability in accordance with 37 CFR §1.56. I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I hereby claim the priority benefits under 35 U.S.C. §119 of any application(s) for patent or inventor's certificate listed below. All foreign applications for patent or inventor's certificate on this invention filed by me or my legal representatives or assigns prior to the application(s) of which priority is claimed are also identified below.

**PRIOR APPLICATION(S), IF ANY, OF WHICH PRIORITY IS CLAIMED**

<u>COUNTRY</u>	<u>APPLICATION NO.</u>	<u>DATE OF FILING</u>
ISRAEL	132058	SEPT. 23, 1999

**ALL FOREIGN APPLICATIONS, IF ANY, FILED PRIOR  
TO THE APPLICATION(S) OF WHICH PRIORITY IS CLAIMED**

COUNTRY                      APPLICATION NO.      DATE OF FILING

**POWER OF ATTORNEY:**

As a named inventor, I hereby appoint the following attorney(s) and/or agents(s) to prosecute this application and transact all business in the Patent and Trademark office connected therewith: Gordon D. Coplein #19,165, William F. Dudine, Jr. #20,569, Michael J. Sweedler #19,937, S. Peter Ludwig #25,351, Paul Fields #20,298, Marc S. Gross #19,614, Joseph B. Lerch #26,936, Melvin C. Garner #26,272, Ethan Horwitz #27,646, Beverly B. Goodwin #28,417, Adda C. Gogoris #29,714, Martin E. Goldstein #20,869, Bert J. Lewen #19,407, Henry Sternberg #22,408, Peter C. Schechter #31,662, Robert Schaffer #31,194, Robert C. Sullivan, Jr. #30,499, Ira J. Levy #35,587, Joseph R. Robinson #33,448, Scott G. Lindvall #40,325

all of the firm of DARBY & DARBY P.C., 805 Third Avenue, New York, NY 10022

SEND CORRESPONDENCE TO:

DARBY & DARBY P.C.  
805 Third Avenue  
New York, NY 10022

DIRECT TELEPHONE CALLS TO:

S. Peter Ludwig  
212-527-7700

**FULL NAME AND RESIDENCE OF INVENTOR 1**

LAST NAME: GEIST      FIRST NAME: Daniel      MIDDLE NAME:

CITY: Haifa      STATE OR FOREIGN COUNTRY: Israel      COUNTRY OF CITIZENSHIP: Israel

POST OFFICE ADDRESS: 3 Petel Street      CITY: Haifa      STATE OR COUNTRY: Israel

ZIP CODE: 34556

FULL NAME AND RESIDENCE OF INVENTOR 2

LAST NAME: GRUMBERG FIRST NAME: Orna MIDDLE NAME:

CITY: Haifa STATE OR FOREIGN COUNTRY: Israel COUNTRY OF CITIZENSHIP: Israel

POST OFFICE ADDRESS: 64 Denya Street CITY: Haifa STATE OR COUNTRY: Israel

ZIP CODE: 34980

FULL NAME AND RESIDENCE OF INVENTOR 3

LAST NAME: KATZ FIRST NAME: Sagi MIDDLE NAME:

CITY: Binyamina STATE OR FOREIGN COUNTRY: Israel COUNTRY OF CITIZENSHIP: Israel

POST OFFICE ADDRESS: Ganei Binyamina CITY: Binyamina STATE OR COUNTRY: Israel

ZIP CODE: 30500

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

SIGNATURE OF INVENTOR 1: \_\_\_\_\_ DATED: \_\_\_\_\_  
Daniel GEIST

SIGNATURE OF INVENTOR 2: \_\_\_\_\_ DATED: \_\_\_\_\_  
Orna GRUMBERG

SIGNATURE OF INVENTOR 3: \_\_\_\_\_ DATED: \_\_\_\_\_  
Sagi KATZ